



Outline Dimension

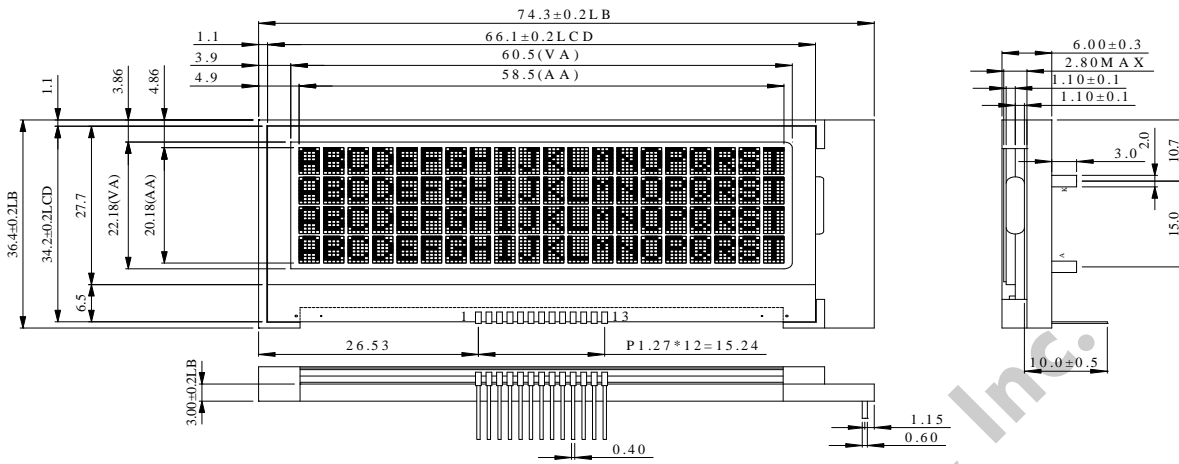

PIN NO	SYMBOL
1	/RES
2	VO _{UT}
3	V ₀
4	V ₁
5	V ₂
6	V ₃
7	V ₄
8	V _{DD}
9	V _{DDREG}
10	V _{DDIO}
11	V _{SS}
12	SCL
13	SDA

1	Led Type	ESTN
2	Viewing Direction	6 O'clock
3	Drive Method	1/33DUTY_1/6BIAS
4	Polsrizer Mode	Transflective/Positive
5	VDD	3.0 . 5.0V / / VOP: 7. 8V
6	Operating Temperature	-20°C ~ 70°C
7	Storage Temperature	-30°C ~ 80°C
8	Backlight	LED WHITE (3020)
9	IC	SSD1803AM1Z



The non-specified tolerance of dimension is $\pm 0.2\text{mm}$.

