

Mechanical Data

Item	Standard Value	Unit
Module Dimension	85.0x25.2	mm
Viewing Area	66.0x16.0	mm
Mounting hole	80.3x22.0	mm
Character Size	2.95x5.55	mm

Absolute Maximum Rating

Item	Symbol	Standard Value			Unit
		min.	typ.	max.	
Power Supply	VDD-VSS	-0.3	---	7.0	V
Input Voltage	VI	-0.3	---	VDD	V

Note : VSS=0 Volt, VDD=5.0 Volt.

Electrical Characteristics

Item	Symbol	Condition	Standard Value			Unit
			min.	typ.	max.	
Input Voltage	VDD	VDD=+5V	4.7	5.0	5.3	V
Supply Current	IDD	VDD=5V	---	1.2	1.5	mA
Recommended LC Driving Voltage for Normal Temp. Version module	VDD-V0	-20°C	---	---	5.2	V
		0°C	---	---	4.2	
		25°C	---	3.8	---	
		50°C	3.5	---	---	
LED Forward Voltage	VF	25°C	---	4.2	4.6	V
			Array Edge	---	100	
LED Forward Current	IF	25°C	---	20	40	mA
EL Power Supply Current	IEL	Vel=110VAC;400Hz	---	---	5.0	mA

Feature

- 5x8 dots includes cursor
- Built-in controller (ST 7066 or Equivalent)
- +5V power supply
- 1/16 duty cycle
- Optional: smaller character size (2.95x4.35mm)


Pin NO.	Symbol	Function
1	DB7	Data bus line
2	DB6	Data bus line
3	DB5	Data bus line
4	DB4	Data bus line
5	DB3	Data bus line
6	DB2	Data bus line
7	DB1	Data bus line
8	DB0	Data bus line
9	E	H→L Enable signal
10	R/W	H/L Read/Write signal
11	RS	H/L Register select signal
12	Vo	Contrast Adjustment
13	Vss	GND
14	Vdd	Power Supply(+5V)

Display Character Address Code:

Display position	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
DD RAM Address	00	01														0F
DD RAM Address	40	41														4F

RC1602G Character 16x2 dots

Dimension drawing

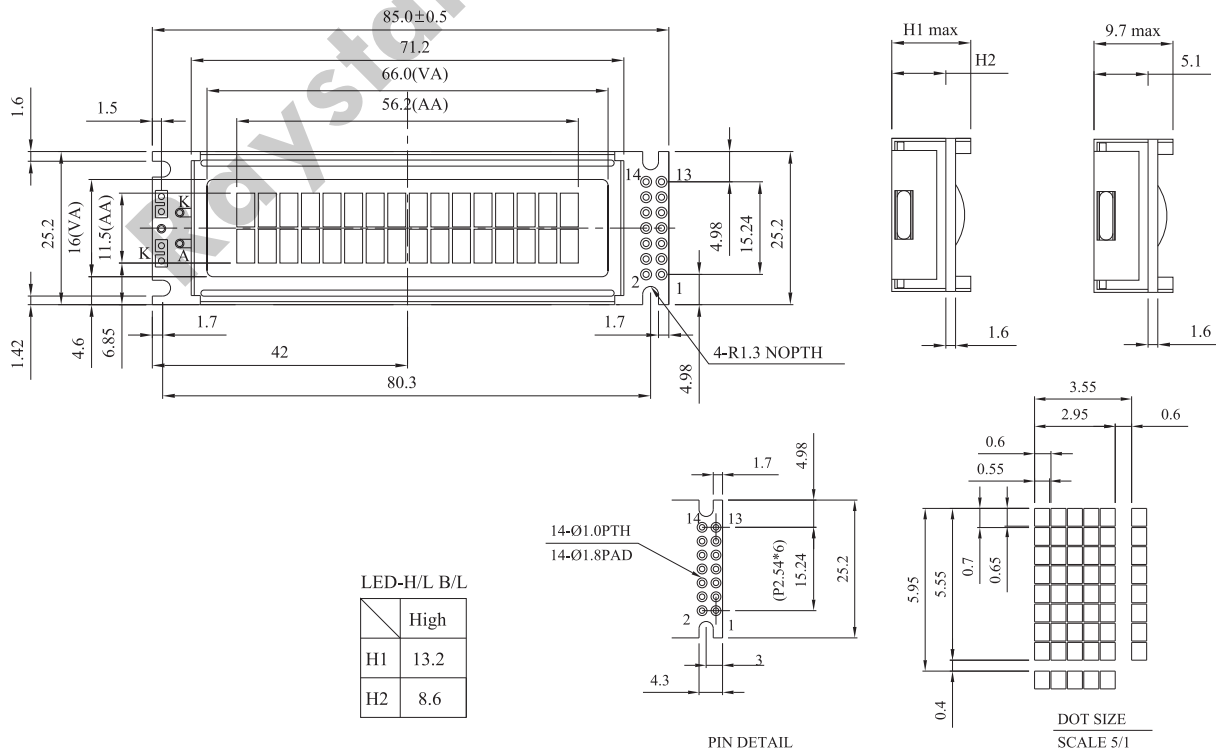

Character type