TFT DISPLAY SPECIFICATION

RAYSTAR Optronics, Inc.
曜凌光電股份有限公司

曜凌光電股份有限公司
Raystar Optronics, Inc.
T: +886-4-2565-0761 | F: +886-4-2565-0760
salescontact@raystar-optronics.com | www.raystar-optronics.com

RFH700D5-AWW-LNN

General Specifications

- Size: 7.0 inch
- Dot Matrix: 1024 x RGB x 600(TFT) dots
- Module dimension: 169.9(W) x 103.4(H) x 5.6(D) mm
- Active area: 154.2144 x 85.92 mm
- Pixel pitch: 0.1506x 0.1432 mm
- LCD type: TFT, Normally Black, Transmissive
- View Angle: 80/80/80/80
- TFT Driver IC: JD9165BA
- TFT Interface: LVDS
- Backlight Type: LED, Normally White
- Touch Panel: Without Touch Panel
- Surface: Anti-Glare

RAYSTAR OPTRONIC

Interface

LCM PIN Definition

Pin No.	Symbol	Function
1	VCOM	Common Voltage
2	VDD	Digital circuit
3	VDD	Digital circuit
4	NC	No connection
5	RESET	Global reset pin
6	STBYB	Standby mode, Normally pulled high STBYB = “1”, normal operation STBYB = “0”, timing controller, source driver will turn off, all output are High-Z
7	GND	Ground
8	RXIN0-	Negative LVDS differential data input
9	RXIN0+	Positive LVDS differential data input
10	GND	Ground
11	RXIN1-	Negative LVDS differential data input
12	RXIN1+	Positive LVDS differential data input
13	GND	Ground
14	RXIN2-	Negative LVDS differential data input
15	RXIN2+	Positive LVDS differential data input
16	GND	Ground
17	RXCLKIN-	Negative LVDS differential clock input
18	RXCLKIN+	Positive LVDS differential clock input
19	GND	Ground
20	RXIN3-	Negative LVDS differential data input
21	RXIN3+	Positive LVDS differential data input
22	GND	Ground
23	NC	No connection
24	NC	No connection
25	GND	Ground
26	NC	No connection

RAYSTAR OPTRONIC

27	NC	No connection
28	SELB	6bit/8bit mode select H:6bit / L:8bit
29	AVDD	Power for Analog Circuit
30	GND	Ground
31	VLED-	LED_ Cathode
32	VLED-	LED_ Cathode
33	L/R	Horizontal inversion
34	U/D	Vertical inversion
35	VGL	Negative power for TFT
36	NC	No connection
37	NC	No connection
38	VGH	Positive power for TFT
39	VLED+	LED_ Anode
40	VLED+	LED_ Anode

RAYSTAR OPTRONIC

Contour Drawing

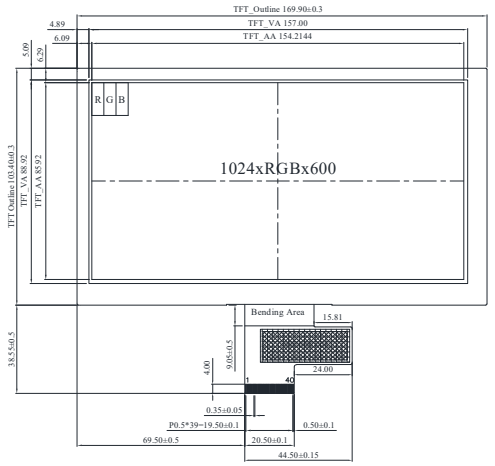

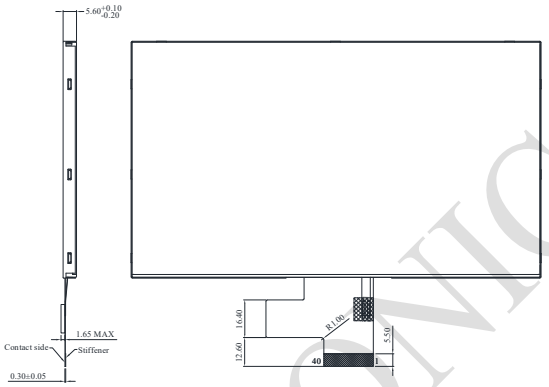

PIN NO	SYMBOL
1	VCOM
2	VDD
3	VDD
4	NC
5	RESET
6	STBYB
7	GND
8	RXIN0-
9	RXIN0+
10	GND
11	RXIN1-
12	RXIN1+
13	GND
14	RXIN2-
15	RXIN2+
16	GND
17	RXCLKIN-
18	RXCLKIN+
19	GND
20	RXIN3-
21	RXIN3+
22	GND
23	NC
24	NC
25	GND
26	NC
27	NC
28	SELB
29	AVDD
30	GND
31	VLED-
32	VLED-
33	L/R
34	U/D
35	VGL
36	NC
37	NC
38	VGH
39	VLED+
40	VLED+

The non-specified tolerance of dimension is ±0.3mm.

RAYSTAR OPTRONIC

Absolute Maximum Ratings

Item	Symbol	Min	Typ	Max	Unit
Operating Temperature	TOP	-30	—	+85	℃
Storage Temperature	TST	-40	—	+90	℃

Electrical Characteristics

Operating Conditions

Typical Operation Conditions

Item	Symbol	Values			Unit	Remark
		Min.	Typ.	Max.		
Power voltage	VDD	3.0	3.3	3.6	V	
Analog Power	AVDD	-	11	-	V	
TFT Gate ON Voltage	VGH	19.5	20	20	V	
TFT Gate OFF Voltage	VGL	-8.5	-8	-7.5	V	
TFT Common Voltage	VCOMIN	-	4.9	-	V	
Power Current	IDD	-	18	27	mA	VDD=1.8V
Analog Power Current	I_{AVDD}	-	20.94	-	mA	AVDD=11V
TFT Gate ON Current	I_{VGH}	-	1.5	-	mA	VGH=20V
TFT Gate OFF Current	I_{VGL}	-	1.5	-	mA	VGL=-8V
TFT Common Current	I_{VCOMIN}	-	1	-	uA	VCOM=4.9V

LED Driving Conditions

Parameter	Symbol	Min.	Typ.	Max.	Unit
LED current	—	—	200	—	mA
LED voltage	VLED+	16.2	19.2	21.0	V
LED Life Time	—	50,000	—	—	Hr

RAYSTAR OPTRONIC